

## #1A Expanded corner bead

Expanded flange corner bead for exterior corners

A greatly preferred all purpose exterior corner bead. Strong and economical with multiple general use purposes. The wide expanded wing flanges are flexible and can compensate for most irregular surfaces providing even grounds and straight corners. The expanded steel near the nose of the corner bead provides multiple plastering and stucco keys allowing for reinforcement and strength where it is needed the most. Used to reinforce Portland cement stucco at external corners.

### Product Data & Ordering Information:

Material: .0172 base steel, 26 Gauge, G-60 Hot-Dipped Galvanized Steel.  
Also available in 99.97% pure Zinc, compliant with ASTM B-69.  
Dimensions: 2-7/8" Full Wing Flange  
Packaging: 20 Cartons per pallet.

Length	Pieces/Ctn	Feet/Ctn	Carton/Skid	Weight/Carton
10'	30	300'	20	49 lbs.

### ASTM & Code Standards:

- ASTM C841 (interior), C1063, CE 240.01 (exterior), ASTM C926, UBC, ML/SFA-920, the International Code Council IBC and IRC.
- All Expanded Metal Lath Accessories are fabricated from prime galvanized steel G60 zinc coating by the hot dipped method, conforming to steel and coating specification ASTM A-653/A-653M or zinc alloy meeting ASTM B-69 as required in ASTM C1063 and C847.
- MSDS & Product Certification Information is available at [www.clarkdietrich.com](http://www.clarkdietrich.com)
- For installation and placement instructions refer to ASTM C1063, C841 and C926.

### Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination conforming to ASTM C-1063

### Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or portland cement stucco containing calcium chloride additives. The selection of the appropriate type of material for accessories shall be determined by the surrounding climatic and environmental conditions such as salt air, industrial pollution and high humidity.

### Related Accessories:


- #2A-Reinforced Flange Expanded Corner Bead
- Cornerite – Used as a plaster reinforcement on inside corners

### GREEN Benefits and Recycled Content:

**LEED Credit MR 2** - ClarkDietrich products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream. The contribution to LEED must be calculated by the contractor based on weight or volume.

**LEED Credit MR 4** - ClarkDietrich's steel products have a minimum recycled content of 34.9%, of which 24.3% is post-consumer, and 9.4% is pre-consumer. To report a higher number for your project or seek Credit MR 5, contact Technical Services at 888-437-3244 or visit [www.clarkdietrich.com](http://www.clarkdietrich.com).

### 09.22.36 (Metal Lath)

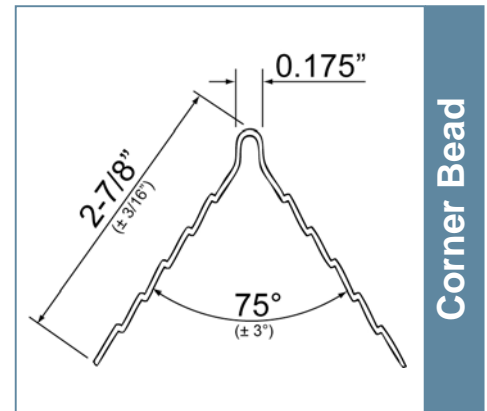

Corner Bead

- Provides true, straight and accurate corners
- Flexible for irregular surfaces



CD-Corner-#1A © 04/11 ClarkDietrich Building Systems

#### Project Information

Name:  
Address:

#### Contractor Information

Name:  
Contact:  
Phone:  
Fax:

#### Architect Information

Name:  
Contact:  
Phone:  
Fax: