


09.22.36 (Metal Lath)

Flat Diamond Mesh Lath

A Galvanized Expanded Steel Plaster/Stucco Base

A superior multi-purpose expanded steel base widely used for interior and exterior plaster and stucco reinforcement. The flat surface is easily cut and formed for use with flat or contoured surfaces. It is an excellent base for stone, spray on structural fireproofing, ornamental work, and under ceramic tile. Expanded metal lath is formed from sheet steel that has been slit and expanded to form thousands of plaster "keys" per square yard. Its time proven exceptional strength and flexibility makes it the preferred metal base requested by quality oriented contractors and design professionals.

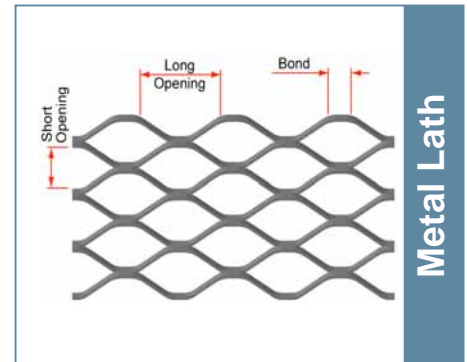

Product Data & Ordering Information:

Material: G-60 Galvanized Steel,
Packaged: 50 bundles or 500 pieces per pallet

Finish	Wt. per Sq Yd.	Sheet Size	Pcs./Bdl.	Yds./Bdl.	Yds./Pallet
Galv.	2.5 lbs.	27" x 97"	10	20	1000
Galv.	3.4 lbs.	27" x 97"	10	20	1000

ASTM & Code Standards:

- ASTM C841 (interior), C1063 (exterior), C847, CE 240.01 and ML/SFA-920.
- All ClarkDietrich Expanded Metal Lath is fabricated from prime galvanized steel, G60 zinc coating by the hot dipped method, conforming to Specification ASTM A-653/A-653M.
- MSDS & Product Certification Information is available @ clarkdietrich.com
- For installation and placement instruction refer to ASTM C1063 and C841.

Storage:


All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather and surface contamination. Per ASTM C-1063.

Limitations:

Galvanized steel products should not be used with magnesium oxychloride cement stucco or Portland cement stucco containing calcium chloride additives.

Related Products:

- Diamond Mesh Self Furring Metal Lath
- Asphalt Paper-backed Metal Lath
- 3/8" High Rib Metal Lath

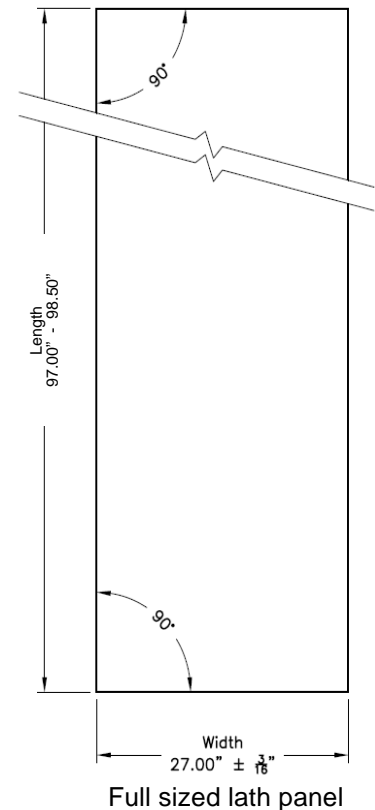

- Strength of Steel
- Multiple Application Uses
- Proven Historical Success

GREEN Benefits and Recycled Content:

LEED Credit MR 2 - ClarkDietrich products are manufactured from cold-formed steel. Steel is 100% recyclable, which helps divert debris from the waste stream. The contribution to LEED must be calculated by the contractor based on weight or volume.

LEED Credit MR 4 - ClarkDietrich's steel products have a minimum recycled content of 34.9%, of which 24.3% is post-consumer, and 9.4% is pre-consumer. To report a higher number for your project or seek Credit MR 5, contact Technical Services at 888-437-3244 or visit www.clarkdietrich.com.

CD-Lath-DML © 04/11 ClarkDietrich Building Systems

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: