



TRIPLEFLO

4" (100 mm) Triple Wall Pipe

Rigid Pipe with Smooth Interior and Exterior Walls for Drainage Applications

*APPLICATIONS

- Drainage trench
- Foundation and basement drainage
- Drainage collector and outlet
- Turf and recreation drainage
- Septic leachfields
- Wire duct
- Downspout runoff

FEATURES

- Available in 10' (3 m) lengths with a nominal diameter of 4" (100 mm) SDR or DR
- Increased resistance to sunlight, heat and UV rays due to the white outer wall
- Compatible with 4" (100 mm) PVC SDR or DR pipes
- Integrated bell
- Pipe stiffness greater than 30 psi (210 kPa)

BENEFITS

- TripleFlo, made of high-density polyethylene (HDPE), stands out favorably from PVC pipes due to its cost and reduced environmental footprint
- HDPE has excellent resistance to breaks, cracks, splits, and impacts in cold weather
- Resistant to corrosion, abrasion, de-icing salts, and vibration
- Extremely durable and effective, the TripleFlo has a lifespan that can exceed 100 years
- Lightweight and easy to install
- Manning value: 0.009
- Consistent with PVC outer diameter per ASTM D2729/CSA 182.1

**Compliant with
ASTM F810**


**Made with over
50% recycled plastics**

* Refer to local, regional and provincial agencies for specific regulations, standards and guidelines. Soleno is not responsible for any improper use of its products.

**DISCOVER THE
TRIPLEFLO** 



SOLENO.COM

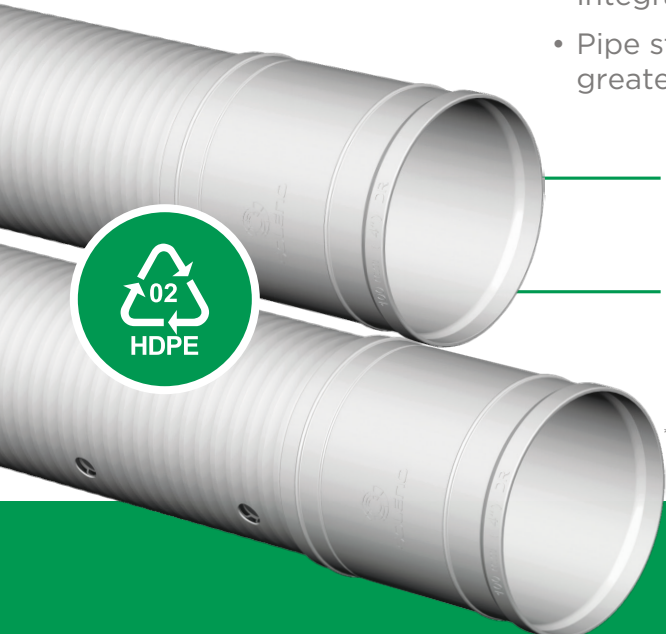



SOLENO

TRIPLE FLO

4" (100 mm) Triple Wall Pipe SPECIFICATIONS

INSTALLATION


- For gravity-flow drainage applications, installation must comply to ASTM D2321
- Recommend backfill height : 1 foot (0.3 m) to 9.8 pi (3 m)
- For leachfield applications, installations must comply with ASTM F481 and local, regional and provincial regulations.

Drainage adhesive glue such as 3M Scotch-Grip™ 4693H Synthetic Elastomer Adhesive or equivalent can be used to seal HDPE triple wall pipe for non-pressure applications. Contact adhesive creates a stronger connection than with the typical push-fit pipe connection preventing separation or root intrusion at the joint. Can be used for systems up to 4 inches in diameter.


DO NOT USE THIS ADHESIVE ON PRESSURE SYSTEMS*.

STANDARD SHIPPING UNIT

- 60 lengths/unit
- Weight : 140.5 kg (309.7 lbs)

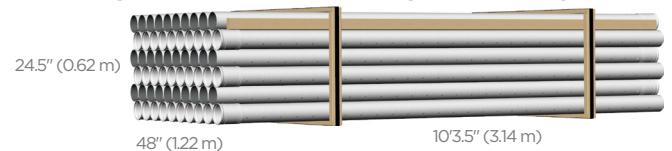

- 90 lengths/unit
- Weight : 200 kg (440 lbs)

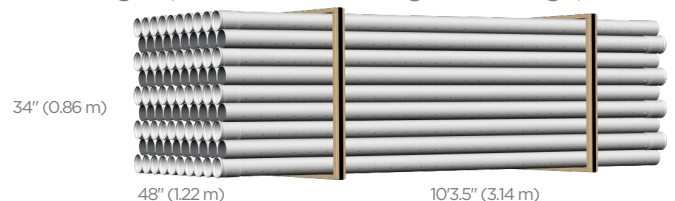


PERFORATION TYPE


SKU	DESCRIPTION
3P04X10-4.8	TRIPLE WALL PIPE 4" (100mm) PERF 4-8 10' (3M) ASTM F810
3P04X10-4.8C	TRIPLE WALL PIPE 4" (100mm) PERF 4-8 10' (3M) BELL ASTM F810
3P04X10	TRIPLE WALL PIPE 4" (100mm) NON PERF 10' (3M) ASTM F810
3P04X10C	TRIPLE WALL PIPE 4" (100mm) NON PERF 10' (3M) BELL ASTM F810
**3P04X10-4.6.8	TRIPLE WALL PIPE 4" (100mm) PERF 4-6-8 10' (3M) ASTM F810
**3P04X10-4.6.8C	TRIPLE WALL PIPE 4" (100mm) PERF 4-6-8 10' (3M) BELL ASTM F810
**3P04X10-4.8.12	TRIPLE WALL PIPE 4" (100mm) PERF 4-8-12 10' (3M) ASTM F810
**3P04X10-4.8.12C	TRIPLE WALL PIPE 4" (100mm) PERF 4-8-12 10' (3M) BELL ASTM F810

**Special Order


Model 4 - 8
Standard - In Stock



Model 4 - 6 - 8
Special Order



Model 4 - 8 - 12
Special Order

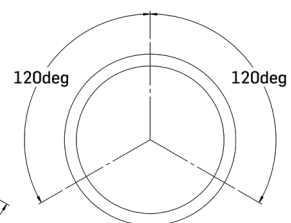

SOLENO.COM